

WAVE PTX TLK 150

**RAPID, RELIABLE DEPLOYMENT.
USE NATIONWIDE.**



EASY TO USE AND MANAGE BUILT FOR THE JOB - SAFELY OPERATE IN VEHICLE NATIONWIDE PUSH-TO-TALK

Get your team up and running quickly. Combine the broad coverage of a nationwide broadband network with the ease of 4G LTE push-to-talk (push button type) device.

Safely operate while driving with one button push-to-talk. Manage talk groups and subscriptions in real time. Increase coverage, connections, and productivity without expanding infrastructure.

There's no costly or time-consuming spectrum licensing, or manual programming required.

FEATURE HIGHLIGHTS

- Private and group push-to-talk
- Over-the-air device management
- 4G LTE, 3G and Wi-Fi connectivity
- GPS Location tracking
- Loud and clear audio
- Real-time presence
- Bluetooth enabled
- 12V/24V dual voltage support
- Giboshi Terminal Adapter provided in-box for installation



GENERAL SPECIFICATIONS

Network	4G LTE: 1,2,3,4,5,7,8,13,17,19,20,21,28 3G UMTS: 1,2,5,8
Channel Capacity	96 Channels
Contact List	300 contacts
Dimensions (W x H x L)	169mm x 44mm x 93mm
Weight	640 g
Voice Codec	OPUS
Wi-Fi	802.11 a/b/g/n - 2.4 / 5.0 GHz
Bluetooth	Bluetooth V4.2 BR/EDR + BLE
Location	GNSS / A-GPS (GPS, GLONASS, Galileo, BeiDou)
SIM CARD	SIM Free*
IP Rating	IP54 IEC60529
Apps Supported	Powered by WAVE
Encryption	AES-256
Antennas	LTE antennas - External GNSS antenna - External Wi-Fi/Bluetooth antenna - Internal
Connectors	Front RJ45 connector for wired mobile microphone Back antenna SMA connectors Back 20-pin MAP connector for other accessories
Rated Audio	4 W (Internal) 16 W (External - 4 ohms)
Audio Distortion @ Rated Audio	3% (Typical)

*Consult Motorola Solutions sales representative for recommended carrier.

ENVIRONMENTAL SPECIFICATIONS


Operating Temperature	-20°C / +60°C
Storage Temperature	-40°C / +85°C
Thermal Shock	Per MIL-STD 810
Humidity	Per MIL-STD 810
ESD	IEC61000 - 4-2 Level 4
Dust and Water Intrusion	IEC60529 - IP54 Cat 2
Packaging Test	Per MIL-STD 810

APPLICABLE U.S. MILITARY SPEC RATINGS

MIL 810G STANDARD*	METHOD	PROCEDURES
Low Pressure	500.5	I, II
High Temperature	501.5	I, II
Low Temperature	502.5	I, II
Temperature Shock	503.5	I, II
Solar Radiation	505.5	I-C
Rain Blowing	506.5	I
Dust Blowing	510.5	I
Immersion	512.5	I
Vibration	514.6	I
Shock	516.6	I,IV

*Also meets equivalent MIL-STD-810-C, -D, -E and -F



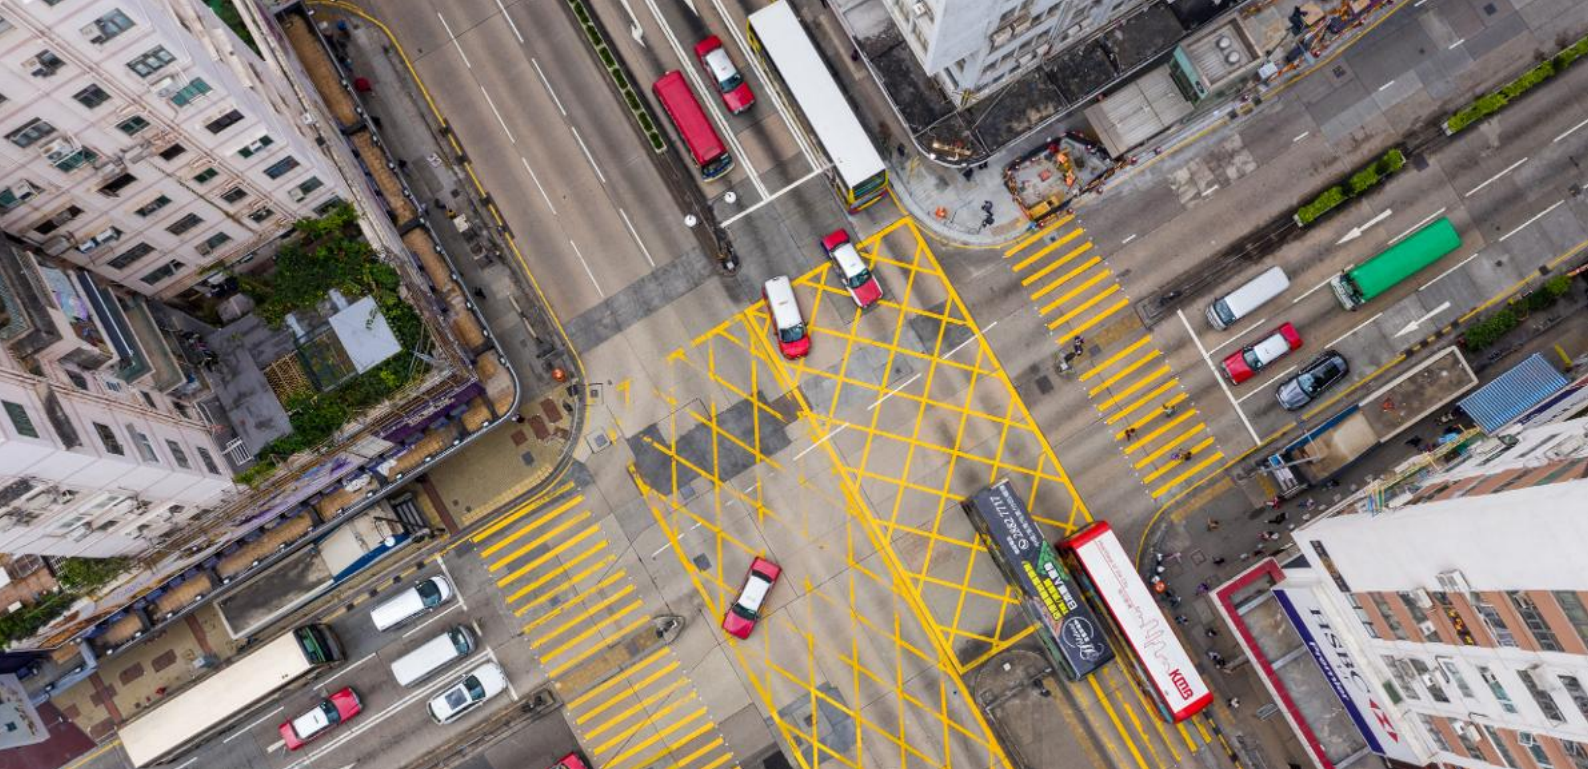


TLK 150 ACCESSORIES



PUSH-TO-TALK SOLUTIONS

Make communicating easier and safer with these optional accessories from a simple PTT microphone to a complete hands free solution.

PMMN4129	Wideband Compact Mobile Microphone
GMMN4065	Visor Microphone
RLN4856	Remote Mount Footswitch Push-to-Talk
RLN4857	Remote Mount Pushbutton Push-to-Talk
RLN4836	Emergency Footswitch

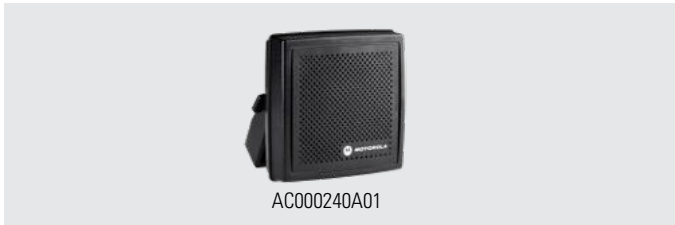

EXTERNAL SPEAKER

Boost audio at your workstation or in your vehicle.

AC000240A01	Wideband External Speaker, 13 W
-------------	---------------------------------



MOUNTING ACCESSORIES

RLN6466	Low Profile Trunnion Kit
RLN6467	High Profile Trunnion Kit
RLN6468	Key Lock Trunnion Mount
FTN6083	In-Dash Mounting Kit - DIN

CABLES AND ACCESSORIES

HKN4137	Mobile Power Cable 10 FT, 14 AWG, 15A
PS000242A01 CB000522A01	PS Adaptor and Cable
HKN9327	Ignition Sense Cable
GMBN1021	Rear Accessory Connector Seal w/ Pins
HLN9457	16 Pin MAP Connector Kit
PMKN4147	Front Telco MMP USB Programming Cable

ANTENNAS

AN000359A01	GNSS Dash Mount Antenna
AN000358A01	LTE Antenna

Motorola Solutions India Pvt Ltd, Motorola Excellence Centre, 415/2, Mehrauli-Gurgaon Rd, Sector 14, Gurugram 122001, India | apmcc.enquiry@motorolasolutions.com

Availability is subject to individual country law and regulations. All specifications shown are typical unless otherwise stated and are subject to change without notice. MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. Wi-Fi is a registered trademark of the Wi-Fi Alliance®. All other trademarks are the property of their respective owners. © 2020 Motorola Solutions, Inc. All rights reserved.

TLK150_DS_AP_011020

